

SPLENDOR ROUND DIRECTABLE



72 MM



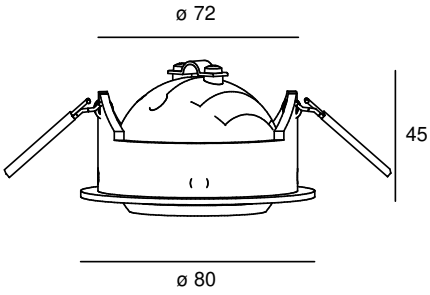



POWERLED(S)	1 x 8 Watt incl.	**LENS**	40° incl.
CRI	90+	**VOLTAGE**	230 VAC
GEAR / DRIVER	230 VAC LED	**MATERIAL**	Aluminium
MOUNTING DEPTH	45 mm	**WEIGHT**	0,250
CUTOUT SHAPE / SIZE	72 mm	**IP**	20

SPECIAL: Torsion springs and Leaf springs included.

MODELS

	ARTICLE N°	DESCRIPTION	COLOUR	KELVIN	LUMEN
	**007101312702**	SPLENDOR ROUND DIRECTABLE INT. WARM WHITE	BLACK STRUC.	2700	600
	007101313002	SPLENDOR ROUND DIRECTABLE INT. WARM WHITE	BLACK STRUC.	3000	600
	**007101312701**	SPLENDOR ROUND DIRECTABLE INT. WARM WHITE	WHITE STRUC.	2700	600
	007101313001	SPLENDOR ROUND DIRECTABLE INT. WARM WHITE	WHITE STRUC.	3000	600
	**007101312703**	SPLENDOR ROUND DIRECTABLE INT. WARM WHITE	ANY RAL	2700	600
	007101313003	SPLENDOR ROUND DIRECTABLE INT. WARM WHITE	ANY RAL	3000	600