



# SPLENDOR ROUND DIRECTABLE



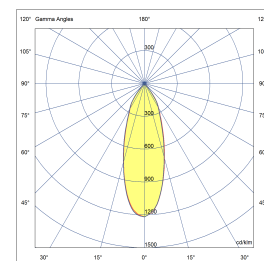


POWERLED(S)	1 x 8 Watt incl.	LENS	40° incl.
CRI	90+	VOLTAGE	230 VAC
GEAR / DRIVER	230 VAC LED	MATERIAL	Aluminium
MOUNTING DEPTH	45 mm	WEIGHT	0,250
CUTOUT SHAPE / SIZE	72 mm	IP	20

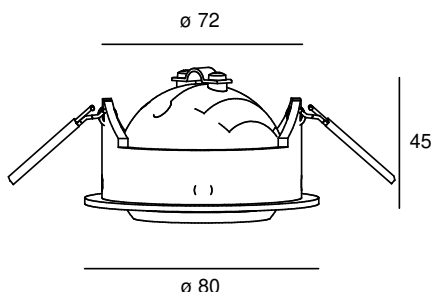

**SPECIAL:** Torsion springs and Leaf springs included.

## MODELS

	ARTICLE N°	DESCRIPTION	COLOUR	KELVIN	LUMEN
	007101312702	SPLENDOR ROUND DIRECTABLE INT. WARM WHITE	BLACK STRUC.	2700	600
	007101313002	SPLENDOR ROUND DIRECTABLE INT. WARM WHITE	BLACK STRUC.	3000	600
	007101312701	SPLENDOR ROUND DIRECTABLE INT. WARM WHITE	WHITE STRUC.	2700	600
	007101313001	SPLENDOR ROUND DIRECTABLE INT. WARM WHITE	WHITE STRUC.	3000	600
	007101312703	SPLENDOR ROUND DIRECTABLE INT. WARM WHITE	ANY RAL	2700	600
	007101313003	SPLENDOR ROUND DIRECTABLE INT. WARM WHITE	ANY RAL	3000	600