




DOT 6 DIRECTABLE

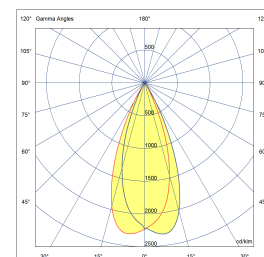

132 x 40

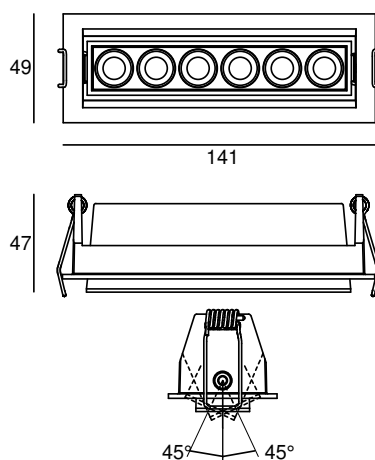

POWERLED(S)	6 x 2 Watt incl.	LENS	36°
ADJUSTABILITY	45°	CRI	90+
VOLTAGE	12W - 500mA	GEAR / DRIVER	Included L 110 x H 22 x W 40
POWER SUPPLY	500mA, 12-24V-, Max.12W	FORWARD VOLTAGE	30V
MATERIAL	Aluminium	MOUNTING DEPTH	40 mm
WEIGHT	0,230 KG	CUTOUT SHAPE / SIZE	Square 132mm x 40mm
IP	20		



OPTIONS: All other Dimmable protocols are available on request.

MODELS

	ARTICLE N°	DESCRIPTION	COLOUR	VISOR COLOUR	KELVIN	LUMEN
	035101312709	DOT 6 DIRECTABLE INT. WARM WHITE	BLACK STRUC.	WHITE STRUC.	2700	826
	035101313009	DOT 6 DIRECTABLE INT. WARM WHITE	BLACK STRUC.	WHITE STRUC.	3000	826
	035101312710	DOT 6 INT. WARM WHITE	BLACK STRUC.	BLACK STRUC.	2700	826
	035101313010	DOT 6 DIRECTABLE INT. WARM WHITE	BLACK STRUC.	BLACK STRUC.	3000	826
	035101312711	DOT 6 DIRECTABLE INT. WARM WHITE	BLACK STRUC.	GOLD STRUC.	2700	826
	035101313011	DOT 6 DIRECTABLE INT. WARM WHITE	BLACK STRUC.	GOLD STRUC.	3000	826
	ARTICLE N°	DESCRIPTION	COLOUR	VISOR COLOUR	KELVIN	LUMEN




035101312706
035101313006

DOT 6 DIRECTABLE INT. WARM WHITE
DOT 6 DIRECTABLE INT. WARM WHITE

WHITE STRUC.
WHITE STRUC.

WHITE STRUC.
WHITE STRUC.

2700 826
3000 826




035101312707
035101313007

DOT 6 DIRECTABLE INT. WARM WHITE
DOT 6 DIRECTABLE INT. WARM WHITE

WHITE STRUC.
WHITE STRUC.

BLACK STRUC.
BLACK STRUC.

2700 826
3000 826



035101312708
035101313008


DOT 6 DIRECTABLE INT. WARM WHITE
DOT 6 DIRECTABLE INT. WARM WHITE

WHITE STRUC.
WHITE STRUC.

GOLD STRUC.
GOLD STRUC.

2700 826
3000 826

ARTICLE N° DESCRIPTION COLOUR VISOR COLOUR KELVIN LUMEN




035101312712
035101313012

DOT 6 DIRECTABLE INT. WARM WHITE
DOT 6 DIRECTABLE INT. WARM WHITE

ANY RAL
ANY RAL

WHITE STRUC.
WHITE STRUC.

2700 826
3000 826




035101312713
035101313013

DOT 6 DIRECTABLE INT. WARM WHITE
DOT 6 DIRECTABLE INT. WARM WHITE

ANY RAL
ANY RAL

BLACK STRUC.
BLACK STRUC.

2700 826
3000 826



035101312714
035101313014

DOT 6 DIRECTABLE INT. WARM WHITE
DOT 6 DIRECTABLE INT. WARM WHITE

ANY RAL
ANY RAL

GOLD STRUC.
GOLD STRUC.

2700 816
3000 826