



BARR WALL DOWN 0,9M

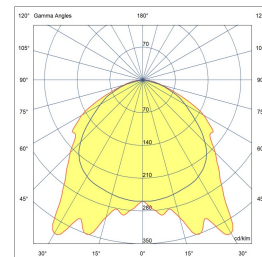

| | | | |
|---------------|--------------------------|--------------|-------------------------|
| SMD LED(S) | 180 per meter | MAX. POWER | 13,05 Watt 1,09A |
| BEAM ANGLE | 120° | CRI | 90+ |
| GEAR / DRIVER | Included | POWER SUPPLY | Constant voltage 12V DC |
| MATERIAL | Aluminium / Pmma Defuser | WEIGHT (KG) | 0,5 |
| IP | 20 | | |

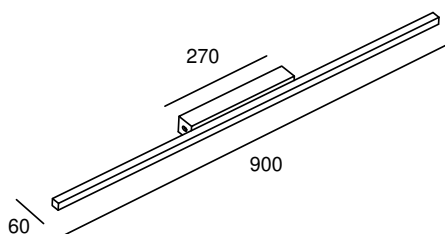

SPECIAL: Deferent length available on demand.

MODELS

| | ARTICLE N° | DESCRIPTION | COLOUR | KELVIN | LUMEN |
|--|--------------|---|--------------|--------|-------|
| | 004031012702 | BARR CEILING DOWN 1 METER INT. WARM WHITE | BLACK STRUC. | 2700 | 990 |
| | 004031013002 | BARR CEILING DOWN 1 METER INT. WARM WHITE | BLACK STRUC. | 3000 | 1080 |
| | 004031014002 | BARR CEILING DOWN 1 METER1 INT. NATURAL WHITE | BLACK STRUC. | 4000 | 1180 |
| | 004031016002 | BARR CEILING DOWN 1 METER1 INT. COLD WHITE | BLACK STRUC. | 6000 | 1350 |
| | 004031012701 | BARR CEILING DOWN 1 METER INT. WARM WHITE | WHITE STRUC. | 2700 | 990 |
| | 004031013001 | BARR CEILING DOWN 1 METER INT. WARM WHITE | WHITE STRUC. | 3000 | 1080 |
| | 004031014001 | BARR CEILING DOWN 1 METER INT. NATURAL WHITE | WHITE STRUC. | 4000 | 1180 |
| | 004031016001 | BARR CEILING DOWN 1 METER1 INT. COLD WHITE | WHITE STRUC. | 6000 | 1350 |
| | 004031012703 | BARR CEILING DOWN 1 METER INT. WARM WHITE | ANY RAL | 2700 | 990 |
| | 004031013003 | BARR CEILING DOWN 1 METER INT. WARM WHITE | ANY RAL | 3000 | 1080 |
| | 004031014003 | BARR CEILING DOWN 1 METER INT. NATURAL WHITE | ANY RAL | 4000 | 1180 |
| | 004031016003 | BARR CEILING DOWN 1 METER1 INT. COLD WHITE | ANY RAL | 6000 | 1350 |